


# Enelion Vertica

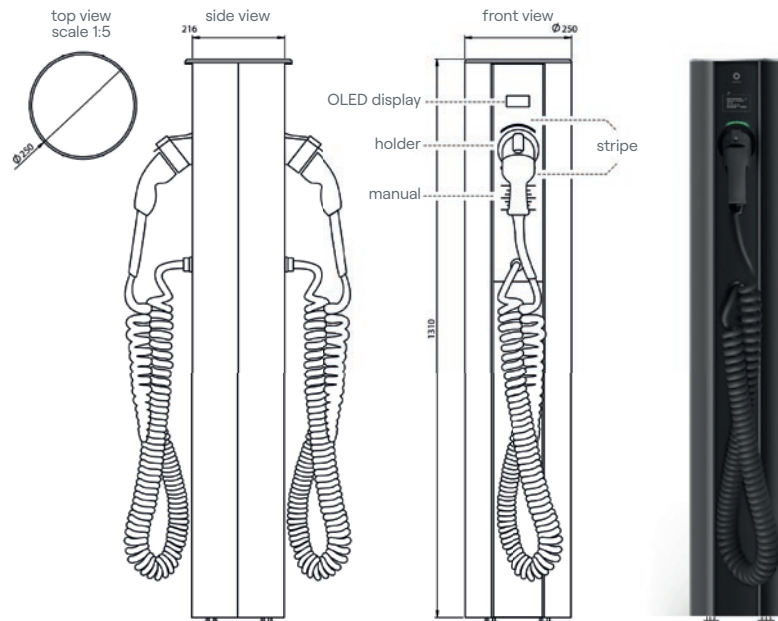

## Technical specifications

Body	Weatherproof, anodised aluminium, powder-coated, tempered plexiglass
Protection against intrusion	IP 54
Impact protection	IK10
Charging connector	AC socket Type 2; EN 62196-1
Current protector*	RCD B / Enelion RCM B + RCD A
Energy Meter	Built-in
Maximum energy meter*	Three-phase
User interface	LED strip, OLED display
Communication module Bridge OCPP 1.6*	Offline / WiFi, Ethernet / LTE (GSM)
User authorization*	RFID + 2 cards (MIFARE / ISO14443) / no charge
Charge point parameters	Three-phase
Voltage in the network	400 V
Charge point frequency	50 Hz
Charging current/power	3× 32 A / 22 kW
Charging voltage	3× 230 V AC
Protection against third party access	Patented lock
Logo: laser engraved logo*	According to customer requirements
Operating temperature	-25 °C / +55 °C
Storage temperature	-40 °C / +80 °C
Maximum height above sea level	2 000 m
Height	1 310 mm
Width	250 mm
Depth	216 mm
Weight	30 kg

\*Optional accessories